

NOVUS PLEXY CLEAR H.P.LED



TECHNICAL DETAILS

Housing :	Extruded aluminium
Diffuser :	Clear PMMA
Control Gear :	Remote electronic driver
Watt :	1W / 1.5W
IP :	68
IK :	10
Weight :	1.50 kg
	- Optional accessories - LED replacement with tools

Colors


 -10
White

 -20
Black

 -90
Anoxal matt

Accessories


 AUTO WIRE
SUPPORT BLOCK


SKB 21



SKB 12

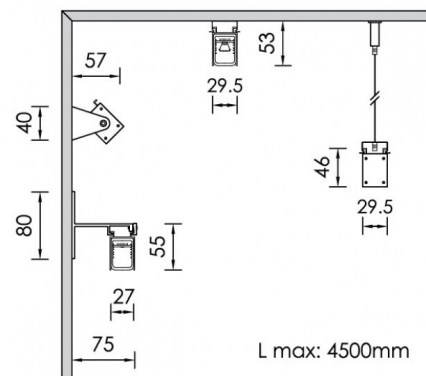
Lighting Sources

**Module 1x H.P.LED - CRI80 - Ripple <3%**


1W - 350mA - 2700K - 150Lm | 1.5W - 500mA - 2700K - 210Lm

1W - 350mA - 3000K - 155Lm | 1.5W - 500mA - 3000K - 215Lm


1W - 350mA - 4000K - 170Lm | 1.5W - 500mA - 4000K - 230Lm

Lenses: 25°/40°/Oval Beam 30°*65° - Reflector: 10°/20°
3step MacAdam - LM80 test report - Lifetime>50.000h L80B10


Lighting



Photometric


Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr